

Hi-Gain™ USB Wireless-150N Window Adapter with Range Amplifier

MODEL: **HAWNU2**



PACKAGE CONTENTS:

- One Hi-Gain™ USB Wireless-150N Window Adapter with Range Amplifier
- 4-in-1 Mounting kit (Desktop, Suction, Magnetic and Wall Mount)
- 5 ft. USB extension cable
- Quick Installation Guide (Mac & PC)
- One Setup CD (includes Software and Manual for Mac & PC)

Surf the Internet, send and receive email, stream music, play online games, and make Internet phone calls with the new and improved HAWNU2 Hi-Gain™ Wireless-150N USB Network Adapter with Range Amplifier. The HAWNU2 transfers data up to 150Mbps, 3X faster than a standard Wireless-G Network. Unlike most adapters in the market where the wireless performance deteriorates as distance between the adapter and the wireless source increases, the HAWNU2 is designed with a High Power USB Amplifier and a 13dBi external antenna to improve the overall wireless performance at a distance. * With an increase in intensive online activities, such as online video, audio and games, the Hawking HAWNU2 is an excellent solution for you to connect your laptop or desktop to the internet from anywhere and anytime! Installation of the HAWNU2 Wireless-150N Adapter is simple and straightforward - run the setup CD and connect the Adapter to your notebook or desktop through an available USB port.

Features

- Connects your laptop or desktop to a wireless network
- Ultra-fast data transfer rate - of up to 3X the data connection rate*
- Of up to 64x the power output and 8x the distance, compare to a standard Wireless-G network
- Multiple Mounting Options (Desktop, Wall, Window and Magnetic Mount)
- Quick and Easy Installation

System Requirements:

- Computer (Mac or PC) with 200MHz or faster processor with CD-Rom
- Windows 2000/XP/Vista/7 or Mac OS X 10.4/10.5/10.6.
- One Available USB Port
- Wireless 802.11b/g/n network*



HAWKING TECHNOLOGIES, INC.

35 HAMMOND, SUITE 150 • IRVINE, CA 92618

SALES: (888) 662-8828

FAX: (949) 206-9072

E-MAIL: sales@hawkingtech.com

TECHNICAL SUPPORT: techsupport@hawkingtech.com

SPECIFICATIONS:

Standard:

- ◆ IEEE 802.11b/g/n
- ◆ Interface: USB 2.0/1.1
- ◆ BUS Type: USB 2.0 Type A
- ◆ Frequency Band
 - 2.4000~2.4835GHz
(Industrial Scientific Medical Band)
- ◆ Data Rate
 - 11b: 1/2/5.5/11Mbps
 - 11g: 6/9/12/24/36/48/54Mbps
 - 11n (20MHz): MCS0-7 (up to 72Mbps)
 - 11n (40MHz): MCS0-7 (up to 150Mbps)
- ◆ Security
 - WEP 64/128, WPA, WPA2
 - Cisco CCX Support
- ◆ Antenna
 - Built-in 13dBi Directional Antenna Connector
- ◆ Output Power
 - 11b: 22dBm±1dBm
 - 11g: 21dBm±1dBm
 - 11n (20MHz): 21dBm±1dBm
 - 11n (40MHz): 17dBm±1dBm
- ◆ Drivers
 - Windows 2000/XP/Vista/7
 - Mac OS X 10.4, 10.5, 10.6
- ◆ LED Link/Activity
- ◆ Dimension
 - Top: 7.75(H) x 5.25(W) x 1(D) in
 - Base: 3.5 (W) in
- ◆ Weight
 - 0.68 lb
- ◆ Temperature
 - Operating : 32~104°F (0~40°C)
 - Storage : 14~140°F (-10~60°C)
- ◆ Humidity
 - Operating: 10~90% (Noncondensing)
 - Storage: Max. 95% (Noncondensing)
- ◆ Certification FCC

SETUP, CONNECT, & GO!

It's easy to install, it's easy to use! Anyone can do it.

STEP 1: Run the Setup CD


STEP 2: Plug in the Wireless USB Adapter

STEP 3: Scan and Connect to your wireless network

RANGE AMPLIFIER



WIRELESS RANGE COMPARISON

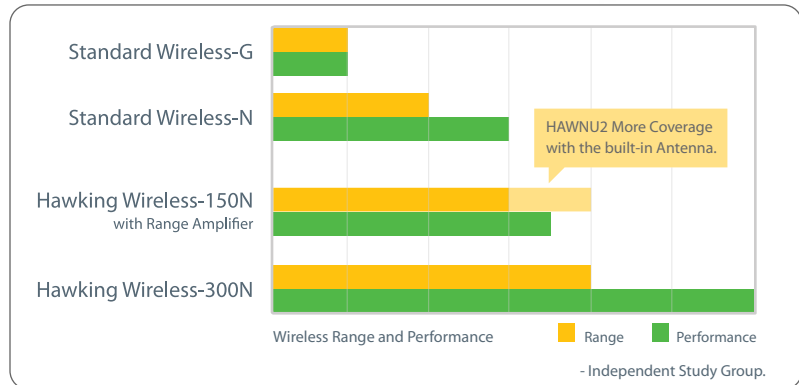

CUSTOMIZE YOUR WIRELESS RANGE

