

PC CARD

10/100M Fast Ethernet PC Card



PN652TX



Power on, Click in, You're connected!

- Easy to install, Easy to use
- Integrated with RJ45 Port
- 10/100 Auto-Sensing
- Compatible with all popular network software
- Compatible with all popular notebooks
- Low power consumption
- Free Technical Support

The Fastest Networking Possible

The Hawking PN652TX is the Fastest Mobile Networking Solution. The PN652TX is a credit card-sized PC Card specially designed for notebook/laptop computers which support PCMCIA or CardBus Type II slots.

The PN652TX will connect your notebook computer to a 10BaseT or 100BaseTX network in just minutes. The media coupler provides a single RJ-45 connector for 10BaseT or 100BaseTX networks. Notebook users can connect to Ethernet LANs at speeds of 100Mbps, which is 10 times faster than traditional LAN environments. Moreover, the support of full duplex mode makes doubling the data rate possible. The 10/100Mbps auto-sensing feature also eliminates backward compatible troubles.

The PN652TX is ready to run with the latest 32bit Network Operating Systems (NOS) like Windows 95/98/ME and Windows NT/2000. The included drivers ensure compatibility with a wide range of network environments, such as Novell Netware, Microsoft Windows 98/95/ME, NT, 2000, Linux, and more. Card and Socket Services (CSS) compatibility also creates a trouble-free with the most notebook computers.

This 10/100Mbps Fast Ethernet PC Card is Microsoft Plug and Play compatible. The installation under Windows 95/98/ME/2000/XP can easily be completed in minutes. For laptops running with DOS or Netware Client, the included menu-driven installation utility and diagnostics program eliminates installation woes.



Package Contents:

- One 10/100 PC Card
- 3.5" Driver diskette
- Easy to follow owner's manual

Systems Requirement:

- IBM compatible notebook with 486 or faster processor
- 10BaseT Ethernet or 100BaseTX Fast Ethernet Network
- One Type II PC card slot PCMCIA or CardBus

Network System Support:

- Novell NetWare 3.x, 4.x, 5.x
- Microsoft Windows 95/98/ME/2000
- Microsoft Windows for Workgroup 3.11
- Microsoft Windows NT 3.x, NT 4.x.
- Linux

Ready, Network & Go!

It's easy to install, it's easy to use! Everyone can do it.


Step 1 - Install Network Adapter

Insert the PN652TX into your notebook's PCMCIA or CardBus Slot. Windows will detect it. Then, insert the software Drivers diskette into the A:/ drive. Windows will automatically install and configure the software for you. It's that easy. You don't even need to worry about timely configuration.

Step 2 - Get Connected

Connect the media coupler (included) to the PC Card and then to the existing network via the RJ45 port. The PN652TX is 10/100 auto-sensing so you don't need to worry about what speed your hub is. That's it. It's that easy.

Mobile Network Diagram:

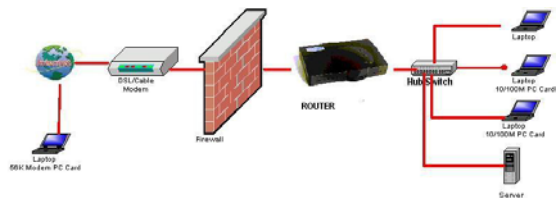

Features	Benefits
Integrated RJ45 Port	No Dongle to break or lose
Dual speed 10/100 Mbps Auto-Sensing	Easy installation in either a 10Mbps or 100Mbps networks.
PCMCIA Type II compliant	Guarantees compatibility with your notebook system
Plug & play installation and driver support for all popular operating systems	Hassle free installation
Full Duplex support	Transmission speeds up to 20Mbps and 200Mbps
Low power consumption	Preserves the life of your battery
3 diagnostic LEDs - Activity, Link, and 10/100Mbps operation	Easily monitor network status

Ordering Information:

CF686TX 10/100M Fast Ethernet CF+ Card
CF682T 10M Ethernet CF+ Card
CF690V 56K V.90 Data/Fax CF+ Modem
CF687A CF+ to PCMCIA Adapter
PN652TX 10/100M PC Card
PN672TX 10/100M CardBus Card
PN612 56K V.90 PC Card

Copyright © Hawking Technologies, Inc. 2001. All rights reserved. All trademarks herein are the property of their respective owners. Product specification subjects to change without notice.

Specification:

Network Interface

- 10Mbps: IEEE 802.3 10BaseT
- 100Mbps: IEEE 802.3u 100BaseTX

Host Interface

- PCMCIA 2.1 compliant
- Type II PC Card

Data Speed

- 10/100 Mbps Auto-Sensing
- 20/200Mbps Full Duplex Support

Driver Support

- Microsoft Windows 95/98
- Microsoft Windows ME, 2000, XP
- Microsoft NT 3.x, 4.x
- NetWare 3.x, 4.x, 5.X
- Linux

Dimension and EMI

- Card size: 3.37" x 2.128" x 0.197"
- Weight: 3 oz
- FCC Class B and CE Mark

Hawking Technologies, INC.

6A Faraday, Irvine, California, USA
Sales: (888) 662-8828, (949) 580-0888
Fax: (949) 580-0880
Email: Sales@hawkingtech.com
Tech Support: (949) 580-0878
Email: Techsupport@hawkingtech.com
Web Site: www.hawkingtech.com

