

## HNC210

# Net-Vision™ 10/100Mbps Wired Network Camera



## HNC210 Wired 10/100M Network Camera

### PACKAGE CONTENTS:

- ♦ HNC210 Wired 10/100Mbps Network Camera
- ♦ One DC Power Adapter
- ♦ CD with Easy-Installation Quick Setup Wizard and Utilities
- ♦ Quick Installation Guide
- ♦ One Camera Stand/Mounting Kit

### Easily Build a Security or Monitoring System

The *Net-Vision*™ HNC210 Wired 10/100Mbps Network Camera is a high performance stand-alone camera that enables remote monitoring, surveillance, and viewing of live video from both within your local area network (LAN) and from outside the network via the Internet. Unlike "web cameras", which require an attached PC for operation, the HNC210 connects directly to the network and has its own IP address, thereby allowing users to access the video from anywhere on the network, as well as from anywhere in the world via web-based remote access. The HNC210 supports the 10/100Mbps Fast Ethernet standard. As a result, the camera can stream high-quality live video at up to 30 frames per second. Installation of the camera is hassle-free with the Quick Setup Wizard utility. Also included with the camera are security and other convenient features, as well as a management and control software application for playback, recording, and more. The versatile and compact HNC210 offers a broad array of applications and can be used to monitor your home, office, and other critical locations.

### Systems Requirement:

- ♦ Local Area Network (LAN): 10Base-T Ethernet or 100BaseTX Fast Ethernet
- ♦ PC, Mac, or Notebook to Access/View the Network Camera
- ♦ Web / Admin Application / Camera Viewer Configuration:
  - Windows XP, ME, 2000, 98SE
  - CPU: Pentium III, 450MHz or above
  - Memory Size: 128MB (256MB recommended)
  - VGA Card Resolution: 800 x 600, or above

## HNC210



### HNC210 Wired 10/100Mbps Net-Vision™ Network Camera

#### ORDERING INFORMATION:

- HNC230G** Wireless-G Net-Vision™ Network Camera
- HNC320W** Wireless Net-Vision™ Network Camera
- HNC720G** Wireless-G Remote-Motion CCD Net-Vision™ Network Camera

#### SPECIFICATIONS:

##### VIDEO SPECIFICATIONS

- ◆ Sensor Resolution: 640 x 480 pixels
- ◆ 1/4" color CMOS sensor, 300K pixels
- ◆ Automatic Gain Control (AGC): Yes
- ◆ Automatic Exposure (AE): Yes
- ◆ Automatic White Balance: Yes
- ◆ Focal Length: 6.0mm
- ◆ Aperture: F=1.8

##### IMAGE (VIDEO SETTINGS)

- ◆ Image Compression: Motion JPEG
- ◆ Frame Rate: 30fps @ CIF, 20fps @ VGA
- ◆ Video Resolution: 320 x 240, 640 x 480

##### SYSTEM HARDWARE

- ◆ LAN Port: (1) RJ-45, 10/100M, Auto-sensed
- ◆ LED Indicators: Monitoring LED (Green), Ready LED (Orange)

##### POWER SUPPLY

- ◆ DC 12V/0.5A
- ◆ EMI Certifications
- ◆ FCC, CE



#### HAWKING TECHNOLOGIES, INC

15281 Barranca Parkway, Irvine, CA 92618

Sales: 888.662.8828, 949.790.0800 Fax: 949.790.0880

Email: sales@hawkingtech.com Email: techsupport@hawkingtech.com

#### READY, NETWORK & GO!

It's easy to install, it's easy to use! Everyone can do it.

##### Step 1 - Connect the HNC210

Connect the HNC210 to your LAN using a standard RJ-45 (Cat 5) cable.


##### Step 2 - Setup and Installation

Insert the installation CD and use the Quick Setup Wizard to install the camera.

##### Step 3 - Configure the HNC210 and Go!

Launch your web browser and type in the camera's IP address. For custom configuration, use the camera's web user interface or the Admin utility. It's that easy!

#### WIRELESS NETWORK DIAGRAM:

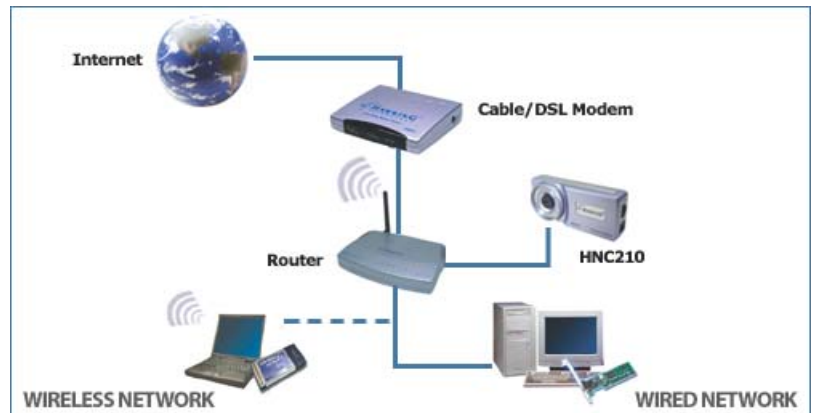

#### FEATURES

- ◆ View Live Video from Within Your Network (LAN) or Anywhere in the World via Web-based Remote Access
- ◆ Connect to a 10/100Mbps Fast Ethernet Wired LAN
- ◆ Easy Installation via Quick Setup Wizard
- ◆ Built-in CPU and Web Server
- ◆ Includes Powerful Management & Control Application Software